

Product Specifications: BarnCraft™ Pull Handles & Door Locks

Rolling Door Pull Handles

- 1) Pull handles for BarnCraft rolling doors are real hand-wrought iron. Slight appearance/size variance can be expected in each.
- 2) Pull Handles are packaged separately and uninstalled on all GlassCraft door products so the doors may be properly finished before the straps are installed. Metal door straps are individually bagged and boxed with screw fasteners included.
- 3) Handles may be ordered individually, without other products.
- 4) Metal door handles may be "touched up" with any exterior grade metal paint, such as Rustoleum™ if needed.

1.25 lbs
Corona Wrought Iron Pull Handle




2.15 lbs
Santa Fe Wrought Iron Pull Handle



2.10 lbs
Monterey Wrought Iron Pull Handle




.55 lbs
Vista Wrought Iron or Stainless Steel Pull Handle

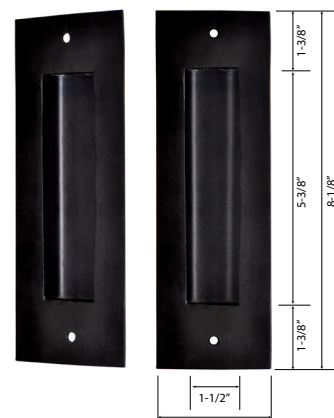


A 1/2" deep pocket must be routed/carved into the door to use the Vista Pull, as the face plate mounts on the door surface


2.6 lbs
Gila Wrought Iron Pull Handle

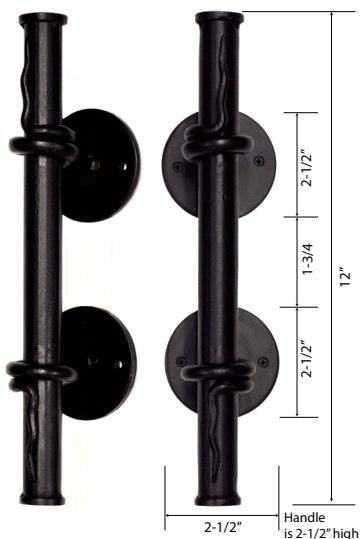


2.8 lbs
Tucson Wrought Iron Pull Handle

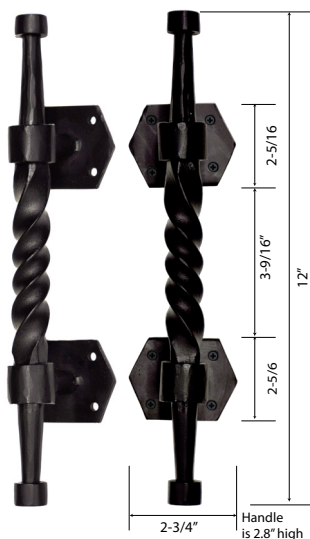

3.1 lbs
San Juan Wrought Iron Pull Handle

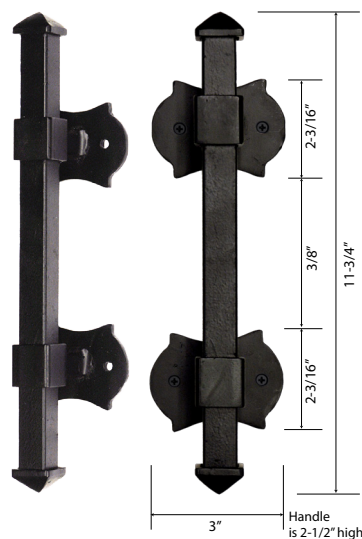


.9 lbs
Metro (12" tall) Stainless Steel Pull Handle

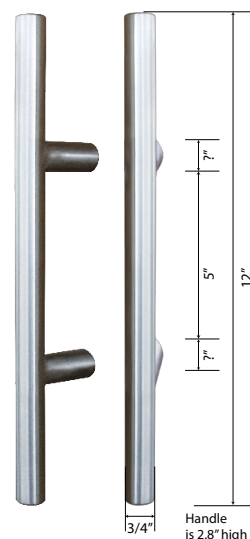


Metro (12" tall) Stainless Steel Pull Handle

1.2 lbs

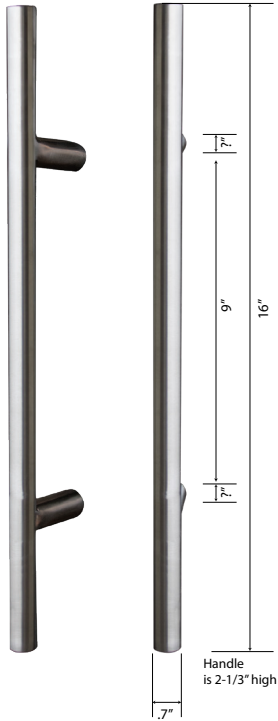


Soft-Close Attachment .60 lbs

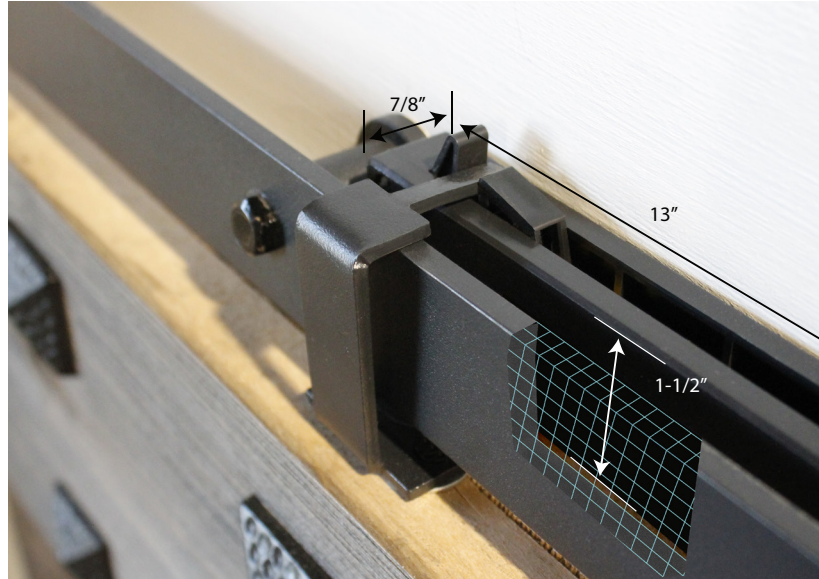


Bypass Bracket Kit = 8.80 lbs


Bypass Bracket = 1.75 lbs

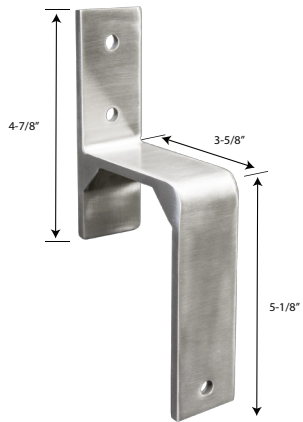


Optional Wall-Mounted Floor Guide



Optional Wall-Mounted Floor Guide



Rail Connector .30 lbs

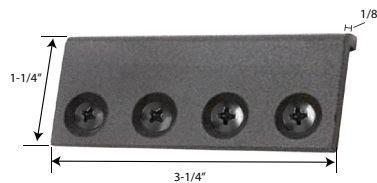

Rolling Door Lock Kits

These small lock kits are designed to be mounted on the edge of the opening over which the rolling door slides, and are available in black or stainless steel.

- 1) The lock mounting plate screws onto the opening with 3 screws; 2 round head screws on the top and bottom, and a flat head screw (not visible in the photos) in the middle.
- 2) The moving lock plate mounts using the 2 round head screws and 2 washers.
- 3) The rolling door lock plate mounts on the edge of back face surface of the rolling door. Note that a 1/8" x 1-1/2" slot that is 1/4" deep must be cut into the door. This rolling door lock plate mounts over the slot.
- 4) The lock is set by rotating the moving lock plate into the slot on the rolling door lock plate.

.1 lbs

